


# Hi-Efficiency Cyclones

From K&B DUCT

'THE NATION'S SHEET METAL SOURCE'

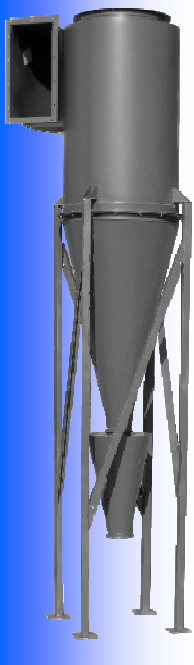

Size	CFM at Pressure drop		Height* (includes vortex breaker)	Footprint	Inlet Ht x Wdth	Outlet Dia.	Dis- charge	Introduc- tory Pric- ing**
	2"	6"						
15	1500	2500	84"	25"x25"	15"x 7.5"	14"	4 "	\$1375
19	2400	4000	105"	32"x32"	19"x 9.5"	18"	4 "	\$1475
24	3800	6500	132"	38"x38"	24" x 12"	23"	6 "	\$2700
30	6000	10000	164"	48"x48"	30" x 15"	29"	6"	\$3780
38	9600	16200	207"	59"x59"	38" x 19"	37"	8"	\$5650
48	15300	25900	260"	72"x72"	48" x 24"	47"	12"	\$7925
60	24000	40500	324"	88"x88"	60" x 30"	60"	14"	call

• Height = outlet to bottom of vortex breaker. The stand extends 24" below the bottom of the breaker.

**\*\*SPECIAL INTRODUCTORY PRICING:** (ie: "Buy them before we figure out what they really cost to make.") This is for cyclone as shown in 18 ga galvanized.

**K&B OFFERS** a full line of **High Efficiency Cyclones** in the standard configurations shown above OR they Will Build to Your Specifications.

**K&B VORTEX BREAKERS** are standard and increase the efficiency. However the cyclones can also be outfitted with Air Locks.

**K&B FABRICATES STRUCTURES AND OPTIONS**. The standard structure provides 24" clearance. Additional Support Structures are available as are , and numerous Outlet Options.

**K&B CYCLONES** are available in galvanized metal and painted hot roll steel.

K&B DUCT 8735 W. Market St. Greensboro, NC 27409  
 PH: 1-866-562-3828 (KNB-DUCT) FAX: 1-336-668-0043 www.kbduct.com